

IES3016-6F

10-port 10/100M Ethernet+ 6-port 100Base-FX(SC/ST/FC)

Unmanaged Industrial Ethernet Switch

Features

- Support IEEE802.3, IEEE802.3u, IEEE 802.3x
- Store and Forward switching process type
- Support MAC address auto-learning, auto-aging
- Support 8K MAC address
- Support 12.8Gbps backboard bandwidth
- Support redundancy power supply(12~48VDC)
- Support 1 channel relay alarm output
- Operating temperature range from -40 to 75°C
- Designed without fan
- DIN rail mounted
- Metal shell, IP30 protection class




Introduction

IES3016-6F-P (12/48VDC) is unmanaged Industrial Ethernet switch with high performance, high cost-effective, it provided 10 port 10Base-T/100Base-TX Ethernet+ 6 port 100Base-FX (FC/SC/ST). Product accorded to CE, FCC standard and Industry grade 4 design requirement, support 2 redundant power input and 1 channel relay alarm output, and -40 ~ 75 °C working temperature, can meet all kinds of Industrial environment requirement. It can use in power, water conservancy, transportation area etc.

alarm output, and -40 ~ 75 °C working temperature, can meet all kinds of Industrial environment requirement. It can use in power, water conservancy, transportation area etc.

Dimension

Unit (mm)

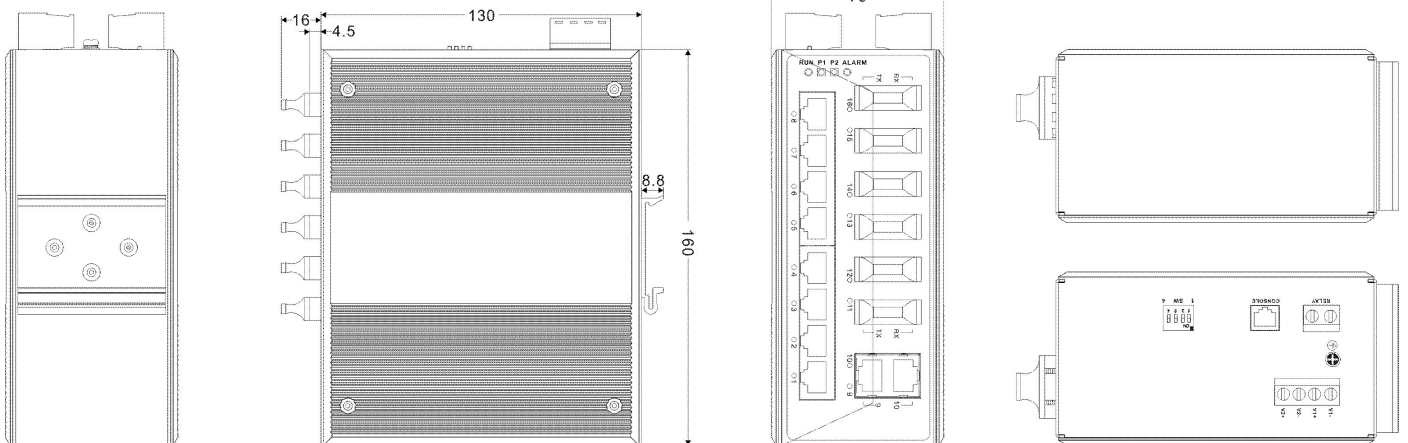



Specification

Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE 802.3x,
Flow control: IEEE802.3x flow control, back press flow control

Exchange attribute

100M forward speed: 148810pps
100M maximum filter speed: 148810pps
Transmit mode: store and forward
System exchange bandwidth: 12.8G
MAC address table: 8K
Memory: 4M

Interface

Electric port: 10Base-T/100Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect
100M optic fiber port: 100Base-FX, SC/ST/FC connector, support single mode (20/40/60/80Km optional), multi mode (2Km), wavelength: 1310nm, 1550nm
Console port: Retain
Alarm port: 2 bit terminal block
1 channel relay alarm output

Transfer distance

Twisted cable: 100M (standard CAT5/CAT5e cable)
Multi-mode: 1310nm, 2/5Km
Single-mode: 1310nm, 20/40/60Km
1550nm, 80/100/120Km

LED indicator

Run indicator: Run
Interface indicator: Link (1~16)
Power supply indicator: P1, P2
Alarm indicator: Alarm

Power supply

Input Voltage: 24VDC (12~48VDC)
Input method: 4 bits 7.62mm terminal block
Support DC dual power supply redundancy
Overload current protect: 1.2A

Consumption

No-load consumption: 8.78W@24VDC
Full-load consumption: 10.49W@24VDC

Working environment

Working temperature: -40~75°C
Storage temperature: -40~85°C
Relative Humidity: 5%~95% (no condensation)

Mechanical Structure

Shell: IP30 protect grade, metal shell
Installation: DIN rail and wall mount
Size (W×H×D): 70mm×160mm×130mm

Industry Standard

EMI: FCC Part 15, CISPR (EN55022) class A
EMS: EN61000-4-2 (ESD), Level 4
EN61000-4-3 (RS), Level 3
EN61000-4-4 (EFT), Level 4
EN61000-4-5 (Surge), Level 3
EN61000-4-6 (CS), Level 3
EN61000-4-8, Level 5

Shock: IEC 60068-2-27
Free fall: IEC 60068-2-32
Vibration: IEC 60068-2-6

Certification

CE, FCC, RoHS, PAL, UL508 (Pending)

Warranty: 5 years

Ordering Information

IES3016-6F (M): 10 port 10/100Base-T(X) + 6 port 100Base-FX Multi-mode SC/ST/FC, 12-48VDC
IES3016-6F (S): 10 port 10/100Base-T(X) + 6 port 100Base-FX Single-mode SC/ST/FC, 12-48VDC
IES3016-6F (SS): 10 port 10/100Base-T(X) + 6 port 100Base-FX single-mode, single fiber SC/ST/FC, 12-48VDC

Packing List

1. Ethernet switch IES3016-6F (plus terminal block) × 1
2. User manual × 1
3. Certificate of quality × 1
4. Warranty card × 1